




Sinewave Crystal Oscillators
 Frequency range: 10 - 90 MHz
 +7 dBm output will drive mixers directly

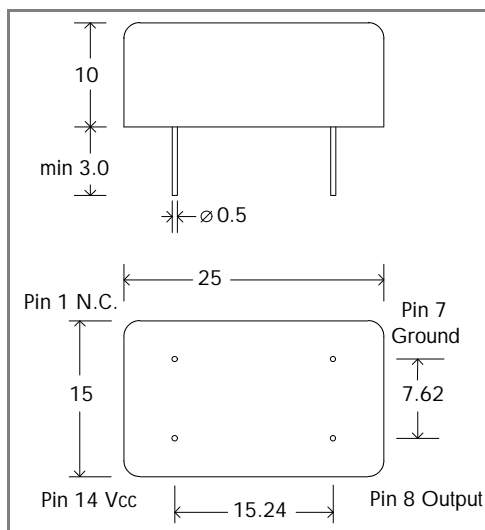

Specification	OSO-00294-01
Frequency	10 - 90 MHz
Output	Sinewave
Amplitude	+7dBm min into 50Ω
Harmonics	-20 dBc max
Sub Harmonics	-40 dBm max
Supply voltage	5 V ± 5%
Supply Current	40 mA max
Temperature Stability	± 10 PPM
Temperature	-10 °C to +60 °C

Unless a resistance weld package these oscillators are not hermetically sealed

OnSpec Oscillators Limited