




SPECIFICATION FOR ONSPEC S7C-B*** SURFACE MOUNT OSCILLATORS

Fast Delivery Service:- 24 Hours, 48 Hours, 5 Working Days on non standard frequencies.

Frequency range 10 MHz to 70 MHz (50MHz @ 3.3 Volts)

Specification	OSO-S7C-series
Frequency	10 - 70 MHz
Output	CMOS
Package	7x5 SMD
Supply voltage	3 - 5 V \pm 5%*
Supply Current	10mA max
Overall Stability	\pm 100ppm
Temperature	0 - 70C
Rise & Fall	5ns (0.1 Vcc to 0.9 Vcc)
Symmetry	45 / 55 — 55 / 45 (at 0.5 Vcc)
Voh min	90%
Vol max	10%
Enable	
Vil max	0.4 Volts
Vih min	2.4 Volts

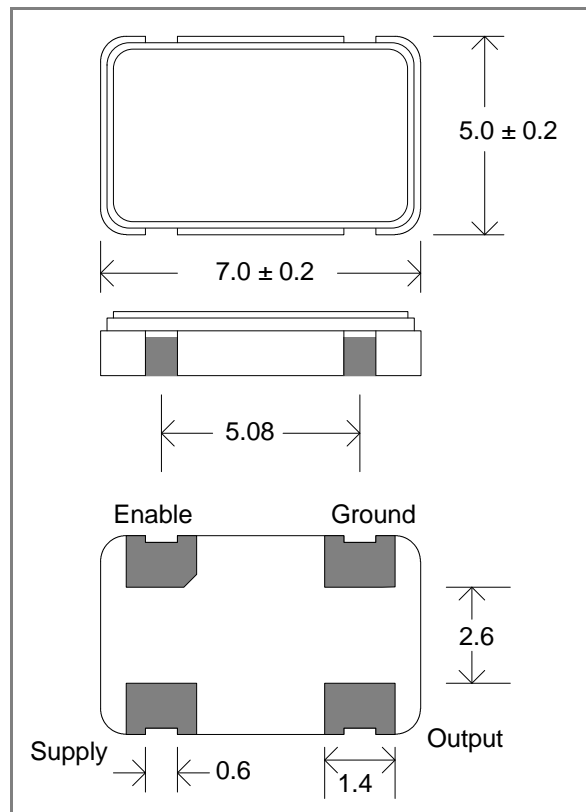

These Oscillators are
hermetically sealed

OnSpec Oscillators Limited

Fax +44 (0)24 7664 2073

Tel +44 (0)24 7664 2024

Email sales@onspec.co.uk

Nov 2004